

SKYSTREAM 3.7™

1.8 KW RESIDENTIAL POWER APPLIANCE

Technical Specifications

Model	Skystream 3.7
Rated Capacity	1.8 kW
Weight	154 lbs. / 70 kg
Rotor Diameter	12 feet / 3.72 meters
Swept Area	115.7 ft ² / 10.87 m ²
Type	Downwind rotor with stall regulation control
Direction of Rotation	Clockwise looking upwind
Blade Material	Fiberglass reinforced composite
Number of Blades	3
Rated Speed	50 - 325 rpm
Tip Speed	66 - 213 f/s / 9.7 - 63 m/s
Alternator	Slotless permanent magnet brushless
Yaw Control	Passive
Grid Feeding	Southwest Windpower inverter 120/240 VAC 50-60/Hz
Braking System	Electronic stall regulation w/redundant relay switch control
Cut-in Wind Speed	8 mph / 3.5 m/s
Rated Wind Speed	20 mph / 9 m/s
User Control	Wireless 2 way interface remote system
Survival Wind Speed	140 mph / 63 m/s

1. Based on a 12 mph (5.4 m/s) wind and utility energy cost of \$.09/kWh
2. Taller towers are available
3. 120V will be available in the 4th quarter of 2006
4. Assuming the Skystream 3.7 is producing more energy than the load is consuming

MADE IN THE USA


Skystream 3.7 is a breakthrough in a new generation of RPA's (Residential Power Appliances) that will change the energy landscape of how homes and small businesses receive electricity. Skystream is the first fully integrated system that produces energy for less than the average cost of electricity in the United States and it produces usable energy in exceptionally low winds.¹

Skystream is available on towers ranging from 35' (10.67m) to 110' (33.5m).² Its universal inverter will deliver power compatible with any utility grid from 110-240 VAC.³ Skystream will efficiently and silently provide up to 100% of the energy needs for a home or small business. Any extra energy is fed into the grid spinning the meter backwards.⁴




UL Certification and CE Certification Pending

PERFORMANCE GRAPH

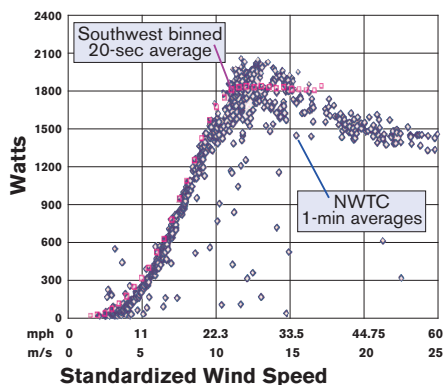

SOUND REPORT

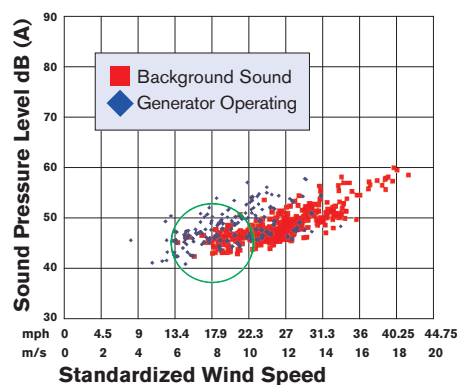

ENERGY CHART

